


STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☒**APPLICATION FOR PERMIT TO DRILL**

2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				1. WELL NAME and NUMBER FEDERAL 1022-27M		
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO				3. FIELD OR WILDCAT NATURAL BUTTES		
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.				5. UNIT or COMMUNITIZATION AGREEMENT NAME		
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217				7. OPERATOR PHONE 720 929-6587		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-0473		11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		9. OPERATOR E-MAIL mary.mondragon@anadarko.com		
13. NAME OF SURFACE OWNER (if box 12 = 'fee')				12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
20. LOCATION OF WELL		FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE
LOCATION AT SURFACE		48 FSL 337 FWL	SWSE	27	10.0 S	22.0 E
Top of Uppermost Producing Zone		48 FSL 337 FWL	SWSE	27	10.0 S	22.0 E
At Total Depth		48 FSL 337 FWL	SWSE	27	10.0 S	22.0 E
21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 48		23. NUMBER OF ACRES IN DRILLING UNIT 640		
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 500		26. PROPOSED DEPTH MD: 8300 TVD:		
27. ELEVATION - GROUND LEVEL 5492		28. BOND NUMBER WYB000291		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE Water permit # 43-8496		

ATTACHMENTS**VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES**

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP
NAME Kevin McIntyre	TITLE Regulatory Analyst I
SIGNATURE	PHONE 720 929-6226
	DATE 09/03/2008
	EMAIL Kevin.McIntyre@anadarko.com
API NUMBER ASSIGNED 43047500970000	APPROVAL  Permit Manager

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	9.625	0	1850		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	1850	36.0			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	1850			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Foamed Cement	215	1.18	15.6

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	0	8300		
Pipe	Grade	Length	Weight			
	Grade I-80 LT&C	8300	11.6			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	8300			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Lite High Strength	380	3.38	11.0
			Pozzuolanic Cement	1350	1.31	14.3



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE August 23, 2008
 WELL NAME Federal 1022-27M TD 8,300' MD/TVD
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,492' GL KB 5,507'
 SURFACE LOCATION SWSE 48' FSL & 337' FWL, SEC.27, T10S, R22E BHL Straight Hole
 Latitude: 39.912864 Longitude: -109.433386 NAD 27
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: BLM (MINERALS and SURFACE), UDOGM, Tri-County Health Dept.

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 36#, J-55, LTC	Air mist
Catch water sample, if possible, from 0 to 3,973'					
	Green River @	0,947'			
	Top of Birds Nest Water @	1322'			
	Mahogany @	1,706'			
	Preset ff GL @				
		1,850' MD			
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
Mud logging program TBD					
Open hole logging program ff TD - surf csg					
	Wasatch @	3,973'	7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-10.0 ppg
	Mverde @	6,280'			
	MVU2 @	7,185'			
	MVL1 @	7,913'			
					Max anticipated Mud required 11.5 ppg
	TD @	8,300'			



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'						
						3520	2020	463000
SURFACE	9-5/8"	0 to 1850	36.00	J-55	LTC	1.12	2.33	8.66
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 8300	11.60	I-80	LTC	2.48	1.28	2.39

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft-partial evac gradient x TVD of next csg point))
- 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
- (Burst Assumptions: TD = 11.5 ppg) .22 psi/ft = gradient for partially evac wellbore
- (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
- MASP 3320 psi

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE			NOTE: If well will circulate water to surface, option 2 will be utilized				
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,470'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	380	60%	11.00	3.38
	TAIL	4,830'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1350	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Brad Laney

DATE: _____

DRILLING SUPERINTENDENT:

Randy Bayne Federal 1022-27M.xls

DATE: _____

**Federal 1022-27M
SWSE Sec. 27, T10S,R22E
UINTAH COUNTY, UTAH
UTU-0473**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	947'
Bird's Nest	1322'
Mahogany	1706'
Wasatch	3973'
Mesaverde	6280'
MVU2	7185'
MVL1	7913'
TD	8300'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	947'
	Bird's Nest	1322'
	Mahogany	1706'
Gas	Wasatch	3973'
Gas	Mesaverde	6280'
Gas	MVU2	7185'
Gas	MVL1	7913'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

4. Proposed Casing & Cementing Program:

Please see the Natural Buttes Unit SOP.

5. Drilling Fluids Program:

Please see the Natural Buttes Unit SOP.

6. Evaluation Program:

Please see the Natural Buttes Unit SOP.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8300' TD, approximately equals 5146 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3320 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

*Please see Natural Buttes Unit SOP Onshore Order #2 – Air Drilling Variance
Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2*

- *Blowout Prevention Equipment (BOPE) requirements;*
- *Mud program requirements; and*
- *Special drilling operation (surface equipment placement) requirements associated with air drilling.*

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet.

The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12-1/4 inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped

and replaced with a 12-1/4 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 9-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements

The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements

Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements

Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling

operation does not encounter productive formations.


Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above..

10. Other Information:

Please see Natural Buttes Unit SOP.

EXHIBIT A

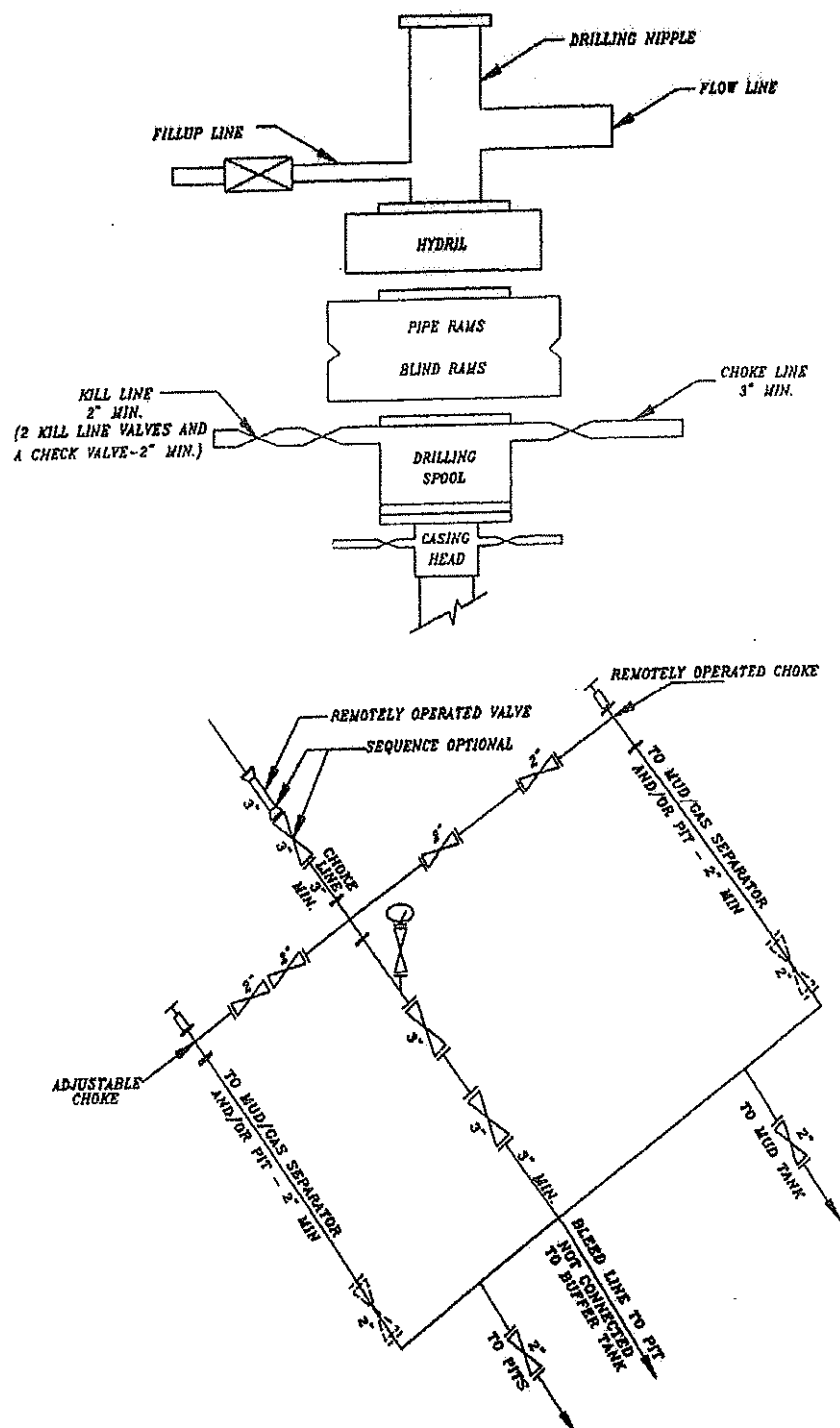**SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK**

**Federal 1022-27M
SWSE Sec. 27,T10S,R22E
UINTAH COUNTY, UTAH
UTU-0473**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to the attached location directions.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

2. Planned Access Roads:

Approximately 0.2 mi. +/- of new access road is proposed. Refer to Topo Map B.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see the Natural Buttes Unit SOP.

Refer to Topo Map D for the location of the proposed pipelines.

A 1,371' rights-of-way will be required. Approximately 1,371' of 4" steel pipeline is proposed from the location to the tie-in point in Section 33, T10S, R22E. Please refer to the Topo Map D. The pipeline will be constructed utilizing existing rights were possible and pulled into place using a rubber tired tractor. The pipeline will be butt-welded together.

Variances to Best Management Practices (BMPs) Requested:

Approximately 1,371' of 4" steel pipeline will be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon Brown (2.5Y 6/2), a non-reflective earthtone.

Interim Surface Reclamation Plan:

This exception is requested due to the current twin and multi-well program. If determined that this well will not be a candidate for either twinning &/or multi-well the operator shall spread the topsoil pile on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The operator will reseed the area using the BLM recommended seed mixture and reclamation methods.

5. Location and Type of Water Supply:

Please see the Natural Buttes SOP.

6. Source of Construction Materials:

Please see the Natural Buttes SOP.

7. Methods of Handling Waste Materials:

Please see the Natural Buttes SOP.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of **40 mil doublefelt**, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E, Pipeline Facility Sec. 36, T9S, R20E, Goat Pasture Evaporation Pond SW/4 Sec. 16, T10S, R22E, Bonanza Evaporation Pond Sec. 2, T10S, R23E (*Request is in lieu of filing Form 3160-5, after initial production*).

8. Ancillary Facilities:

Please see the Natural Buttes SOP.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

Location size may change prior to the drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

10. **Plans for Reclamation of the Surface:**

Please see the Natural Buttes SOP.

upon reclamation of the pit the following seed mixture will be used. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for *drilled* seed are:

Shadscale	8 lbs.
Black Sagebrush	8 lbs.
Galleta Grass	4 lbs.

Operator shall call the BLM for the seed mixture when final reclamation occurs.

11. **Surface/Mineral Ownership:**

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435)781-4400

12. Stipulations/Notices/Mitigation:

Antelope Restriction – No construction May 15th through June 20th

Low profile tanks will be required (shadow gray color).

Pit should be moved into 44'.

Proximity to creeks, ponds, or lakes: Bitter Creek.

13. Other Information:

A Class III archaeological survey and a paleontological survey have been performed and will be submitted.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. Lessee's or Operator's Representative & Certification:

Kevin McIntyre
Regulatory Analyst I
Kerr-McGee Oil & Gas Onshore LP
P.O. Box 173779
Denver, CO 80217-3779
(720) 929-6226

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435) 781-7018


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Bureau of Land Management Nationwide Bond #WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Kevin McIntyre

8/23/2008

Date

Kerr-McGee Oil & Gas Onshore LP
FEDERAL #1022-27M
SECTION 27, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 1.4 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.3 MILES.

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-27M

LOCATED IN UINTAH COUNTY, UTAH

SECTION 27, T10S, R22E, S.L.B.&M.

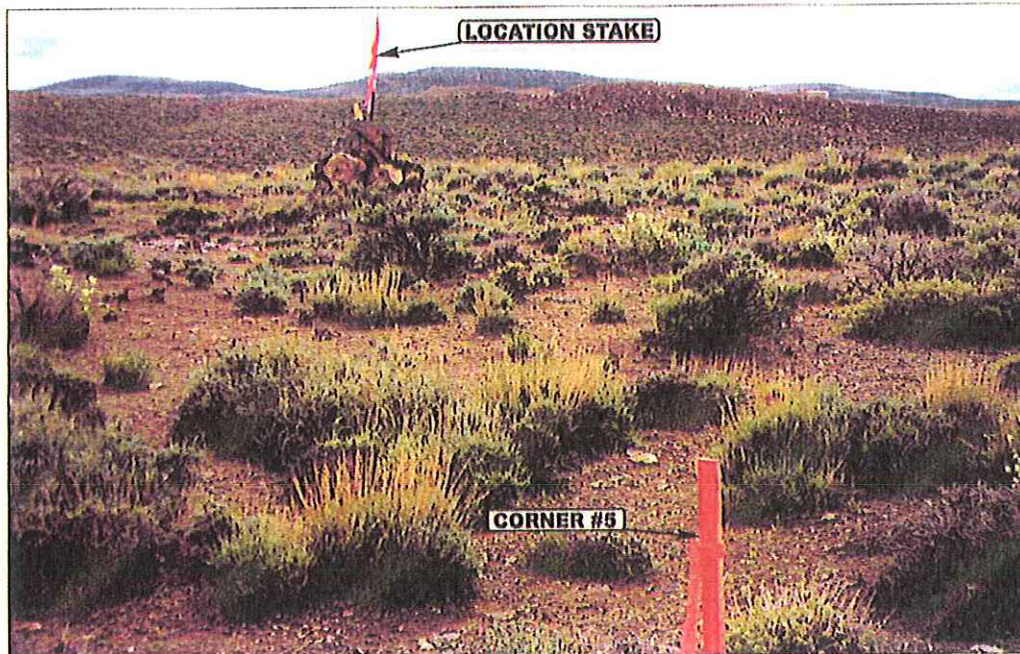


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

04 **26** **07**
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R. DRAWN BY: C.P. REVISED: 00-00-00

T10S, R22E, S.L.B.&M.

Kerr-McGee Oil & Gas Onshore LP


Well location, FEDERAL #1022-27M, located as shown in the SW 1/4 SW 1/4 of Section 27, T10S, R22E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION


TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

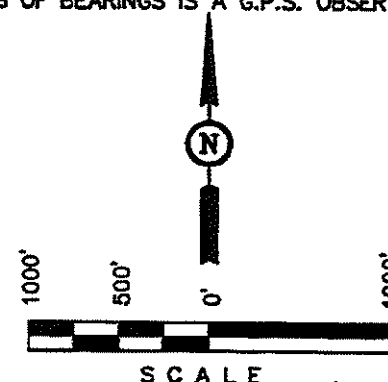


THIS IS TO CERTIFY THAT THE G.L.O. PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME AND UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 04-23-07	DATE DRAWN: 04-27-07
PARTY D.K. J.R. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE Kerr-McGee Oil & Gas Onshore LP	

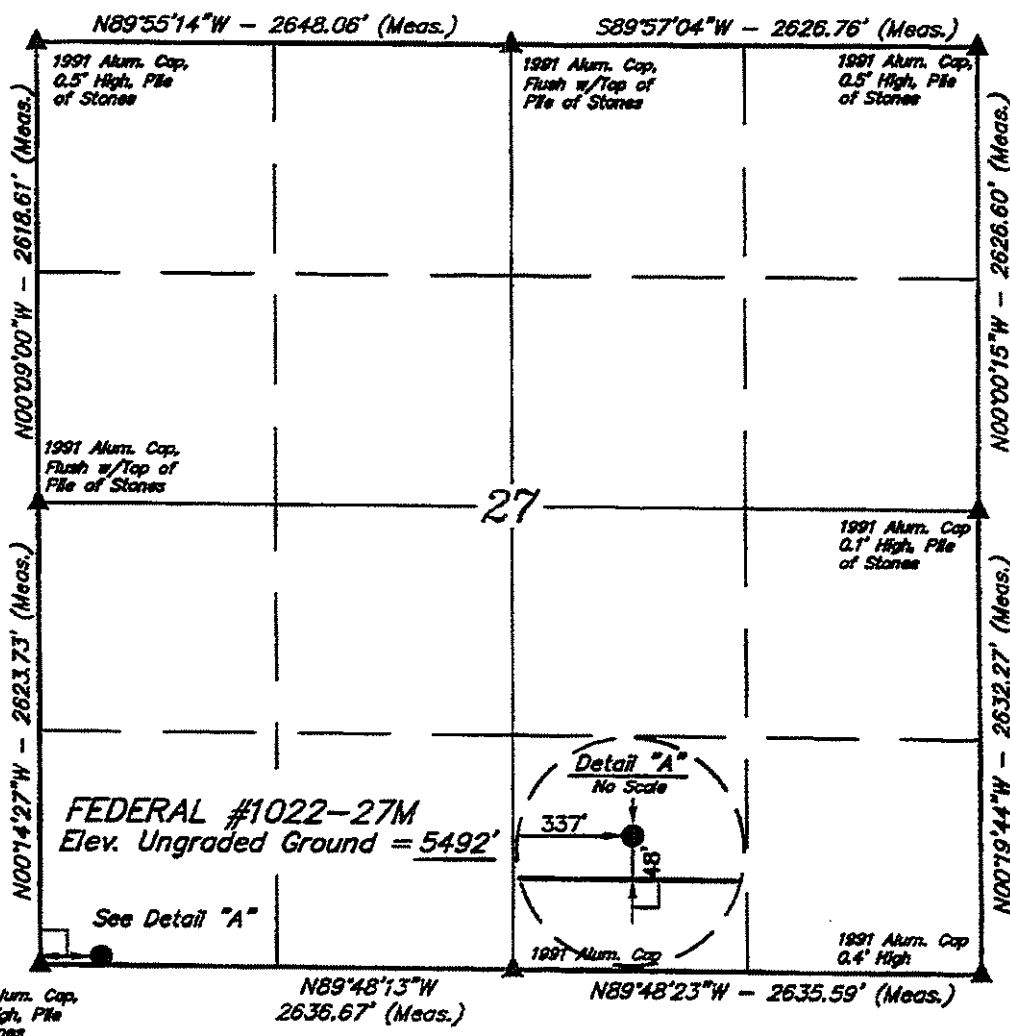

1991 Alum. Cap.
0.5" High, Pile
of Stones

LEGEND:

- └─┘ = 90° SYMBOL
● = PROPOSED WELL HEAD.
▲ = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 39°54'46.19" (39.912831)
LONGITUDE = 109°26'02.64" (109.434067)
(NAD 27)
LATITUDE = 39°54'46.31" (39.912864)
LONGITUDE = 109°26'00.19" (109.433386)



UINTAH ENGINEERING & LAND SURVEYING
65 So. 200 East • Vernal, Utah 84076 • (435) 789-1017

Kerr-McGee Oil & Gas Onshore LP**FIGURE #2****TYPICAL CROSS SECTIONS FOR****FEDERAL #1022-27M****SECTION 27, T10S, R22E, S.L.B.&M.****48' FSL 337' FWL**

1" = 20'
X-Section
Scale
1" = 50'

DATE: 04-27-07

Drawn By: C.H.

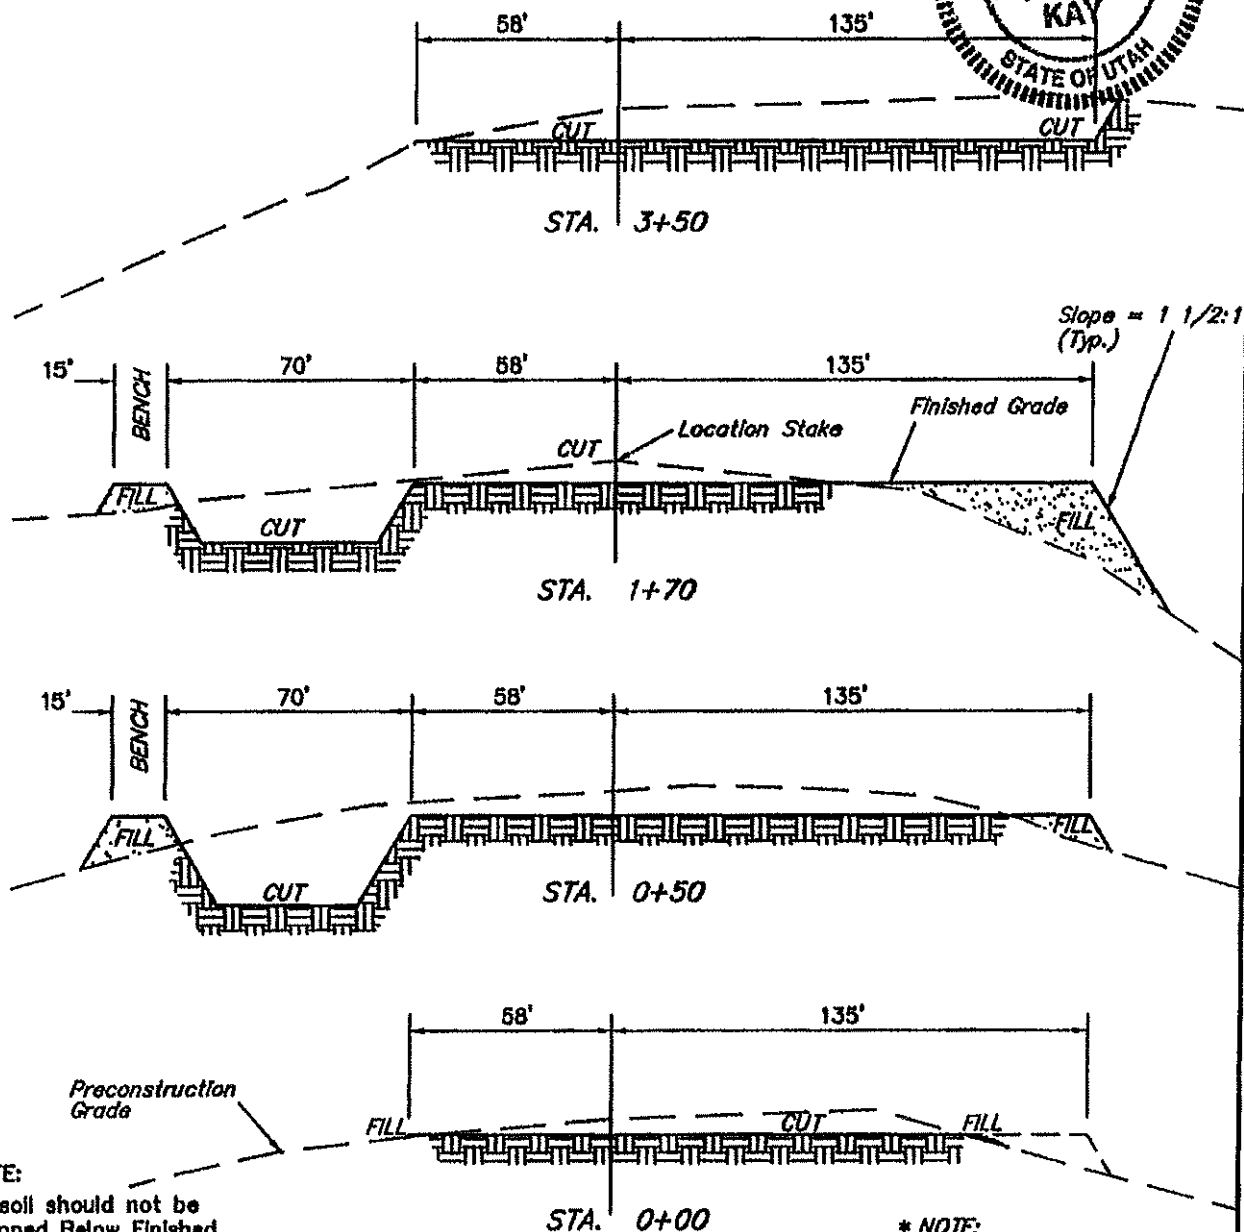**NOTE:**

Topsoli should not be Stripped Below Finished Grade on Substructure Area.

*** NOTE:**

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoli Stripping	= 1,740 Cu. Yds.
Remaining Location	= 5,240 Cu. Yds.
TOTAL CUT	= 6,980 CU.YDS.
FILL	= 3,850 CU.YDS.

EXCESS MATERIAL	= 3,130 Cu. Yds.
Topsoli & Pit Backfill (1/2 Pit Vol.)	= 3,130 Cu. Yds.
EXCESS UNBALANCE	= 0 Cu. Yds.
(After Interim Rehabilitation)	

UINTAH ENGINEERING & LAND SURVEYING

86 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-27M

PIPELINE ALIGNMENT

LOCATED IN UTAH COUNTY, UTAH
SECTION 27, T10S, R22E, S.L.B.&M.



PHOTO: VIEW OF TIE-IN POINT

CAMERA ANGLE: SOUTHEASTERLY



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -


UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

04 **26** **07**
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R. | DRAWN BY: C.P. | REVISED: 00-00-00

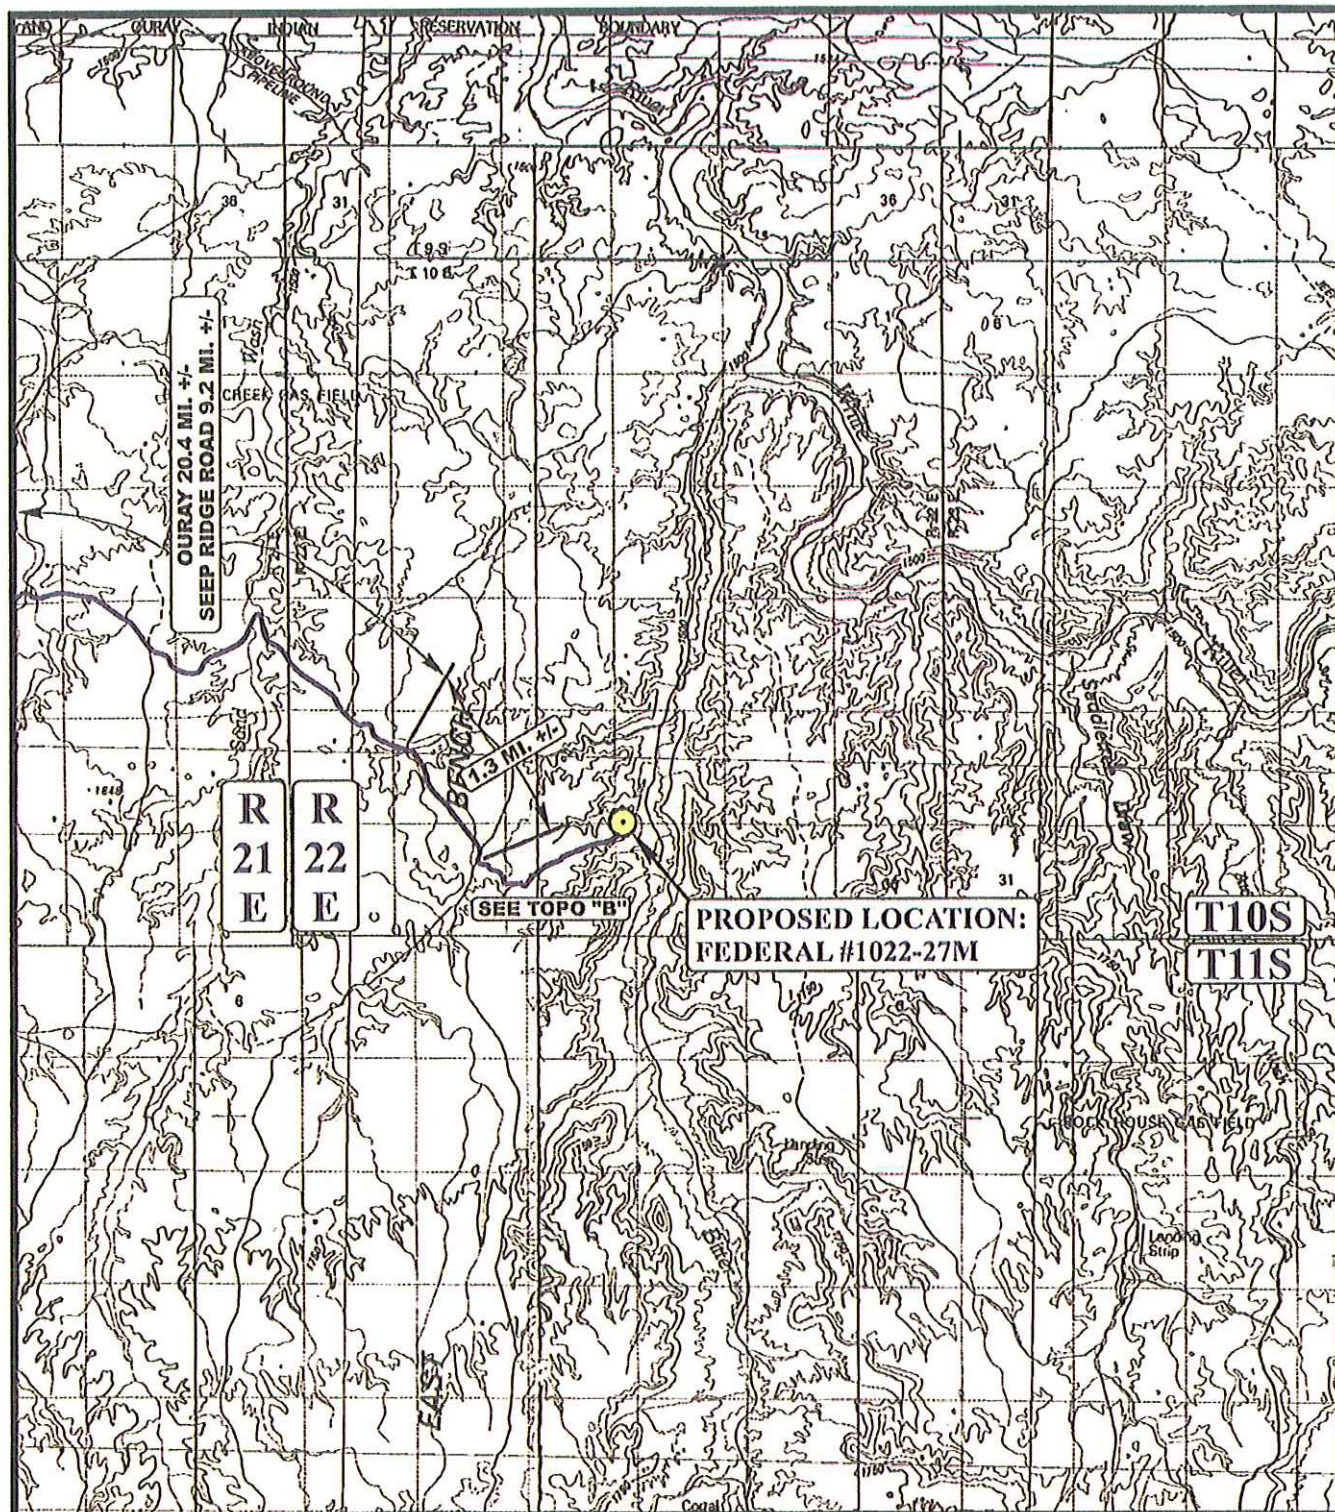**LEGEND:**

● PROPOSED LOCATION

N

Kerr-McGee Oil & Gas Onshore LP**FEDERAL #1022-27M****SECTION 27, T10S, R22E, S.L.B.&M.****48' FSL 337' FWL**


Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

04 **26** **07**
 MONTH DAY YEAR



SCALE: 1:100,000 | DRAWN BY: C.P. | REVISED: 00-00-00

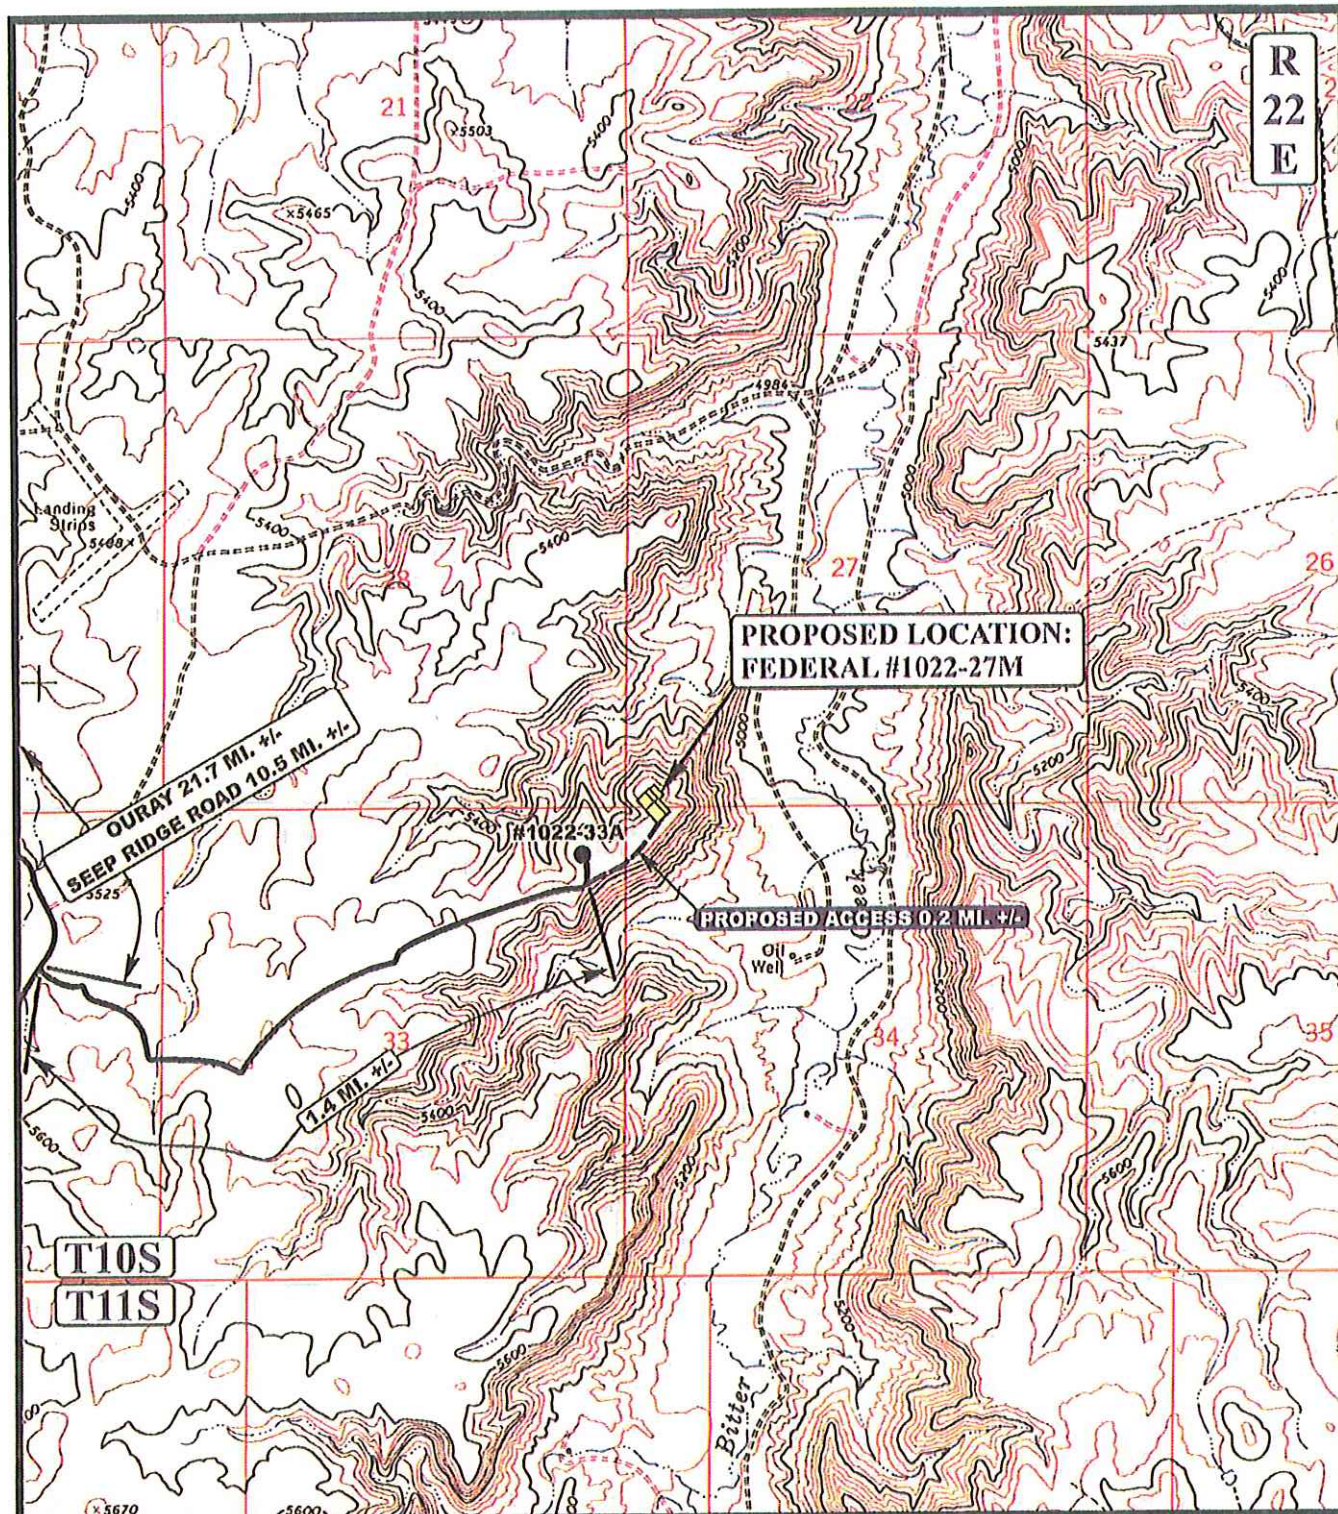

LEGEND:

————— EXISTING ROAD
 - - - - - PROPOSED ACCESS ROAD

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-27M

SECTION 27, T10S, R22E, S.L.B.&M.

48' FSL 337' FWL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
 MAP**

04 26 07
 MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00

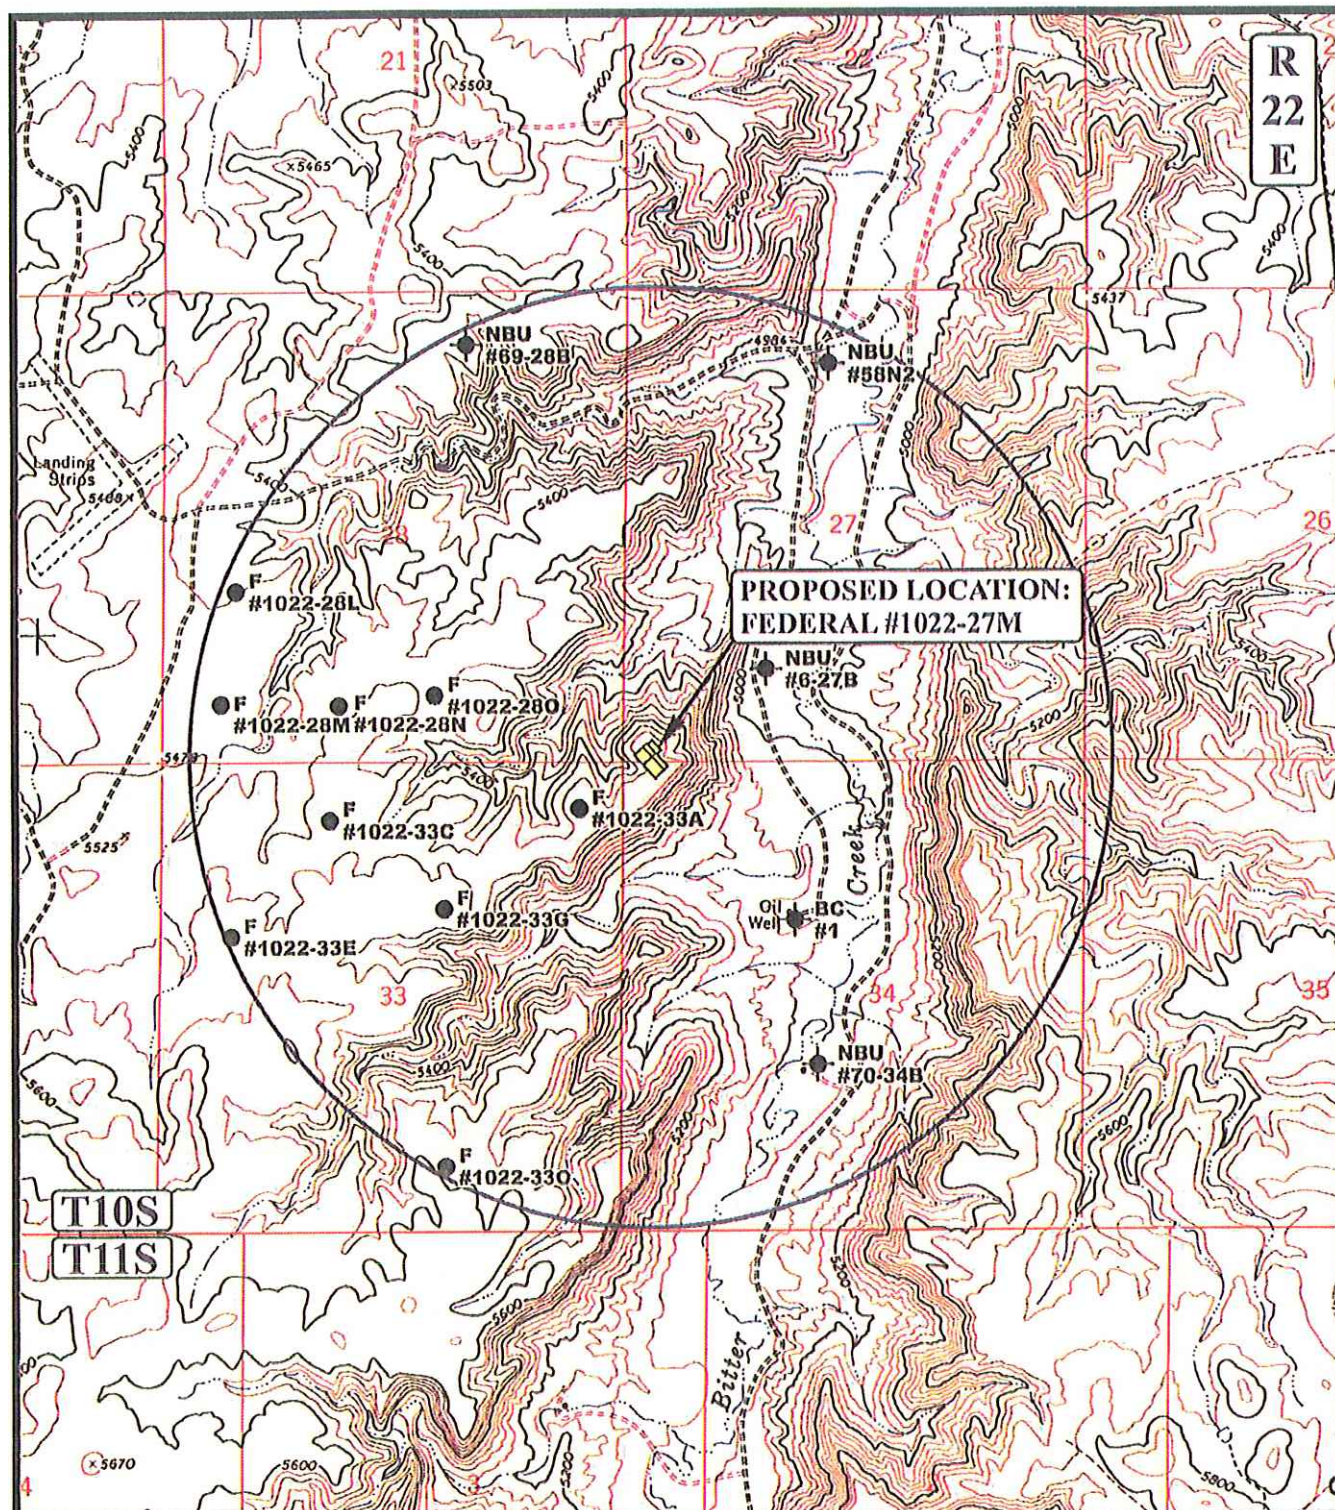

LEGEND:

- | | |
|-------------------|-------------------------|
| ○ DISPOSAL WELLS | ● WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-27M
SECTION 27, T10S, R22E, S.L.B.&M.
48' FSL 337' FWL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

04 26 07
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



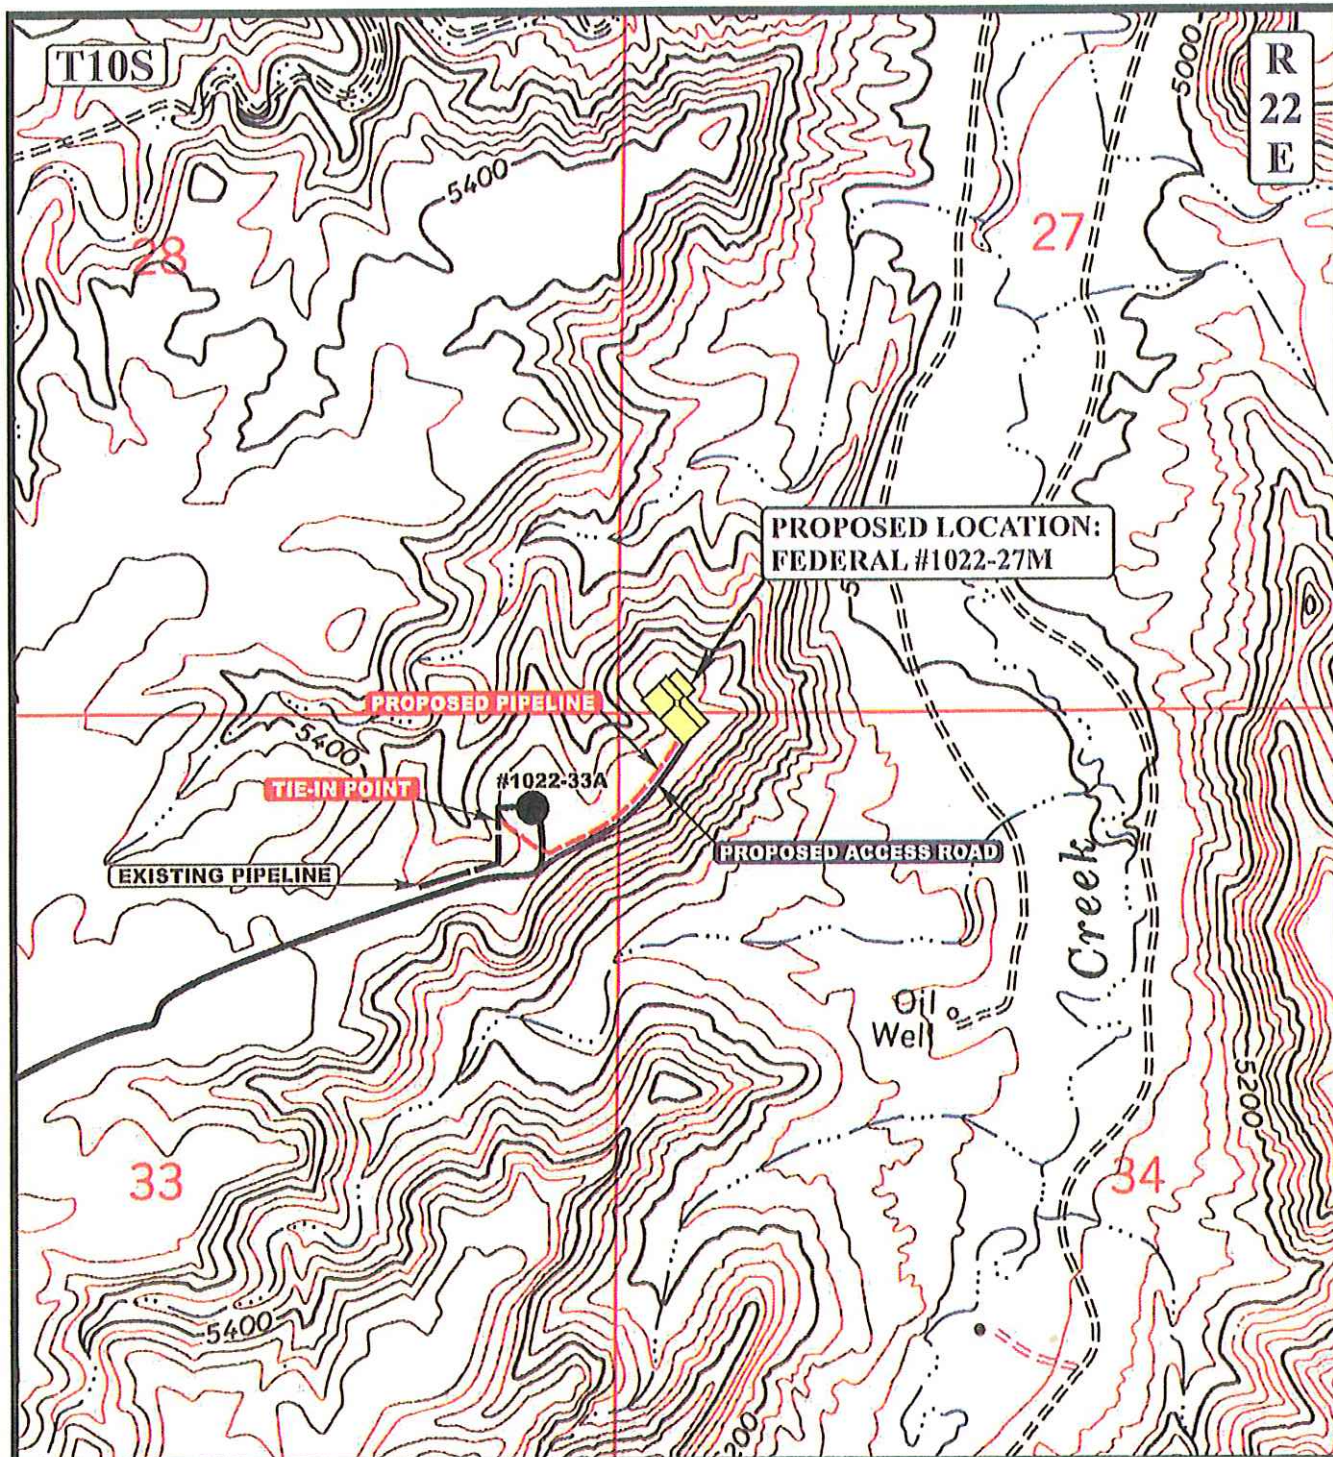

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,371' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - PROPOSED PIPELINE



Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-27M

SECTION 27, T10S, R22E, S.L.B.&M.

48' FSL 337' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

04 26 07
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00

**D
TOPO**

CAUSE: 173-14 / 12-2-1999

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

-  GAS INJECTION
-  GAS STORAGE
-  LOCATION ABANDONED
-  NEW LOCATION
-  PLUGGED & ABANDONED
-  PRODUCING GAS
-  PRODUCING OIL
-  SHUT-IN GAS
-  SHUT-IN OIL
-  TEMP. ABANDONED
-  TEST WELL
-  WATER INJECTION
-  WATER SUPPLY
-  WATER DISPOSAL
-  DRILLING



PREPARED BY: DIANA MASON
DATE: 26-AUGUST-2008

WORKSHEET

APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 8/23/2008

API NO. ASSIGNED: 43047500970000

WELL NAME: Federal 1022-27M

OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995)

PHONE NUMBER: 720 929-6226

CONTACT: Kevin McIntyre

PROPOSED LOCATION: SWSE 27 100S 220E

Permit Tech Review: ☒

SURFACE: 0048 FSL 0337 FWL

Engineering Review: ☐

BOTTOM: 0048 FSL 0337 FWL

Geology Review: ☒

COUNTY: UINTAH

LATITUDE: 39.91277

LONGITUDE: -109.43336

UTM SURF EASTINGS: 633905.00

NORTHINGS: 4419041.00

FIELD NAME: NATURAL BUTTES

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-0473

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

☒ **PLAT**

☒ **Bond:** FEDERAL - WYB000291

☐ **Potash**

☒ **Oil Shale 190-5**

☐ **Oil Shale 190-3**

☐ **Oil Shale 190-13**

☒ **Water Permit:** Water permit # 43-8496

☐ **RDCC Review:**

☐ **Fee Surface Agreement**

☐ **Intent to Commingle**

LOCATION AND SITING:

☐ **R649-2-3.**

Unit:

☐ **R649-3-2. General**

☐ **R649-3-3. Exception**

☒ **Drilling Unit**

Board Cause No: 173-14

Effective Date: 12/22/1999

Siting: 460' fr u bdry & uncomm. tract

☐ **R649-3-11. Directional Drill**

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
17 - Oil Shale 190-5(b) - dmason



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: FEDERAL 1022-27M
API Well Number: 43047500970000
Lease Number: UTU-0473
Surface Owner: FEDERAL
Approval Date: 9/11/2008

Issued to:

KERR-MCGEE OIL & GAS ONSHORE, L.P. , P.O. Box 173779, Denver, CO 80217

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of CAUSE: 173-14.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

Notification Requirements:

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.


Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

Reporting Requirements:

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt", with a stylized, flowing script.

Gil Hunt
Associate Director, Oil & Gas



United States Department of the Interior
BUREAU OF LAND MANAGEMENT
Green River District-Vernal Field Office
170 South 500 East
Vernal, UT 84078
(435) 781-4400 Fax: (435) 781-4410
<http://www/blm.gov/ut/st/en/fo/vernal/html>



IN REPLY REFER TO:
3160
LLUTG01100

February 5, 2009

Raleen White
Kerr McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779

43 047 50097
Re: Well No. Federal 1022-27M
SWSW, Sec. 27, T10S, R22E
Uintah County, Utah
Lease No. UTU-473

Dear Ms. White:

The Application for Permit to Drill (APD) the above-referenced well submitted August 27, 2008, is being returned unapproved per your request to me in an email message received on February 5, 2009. If you intend to drill at this location at a future date, a new APD must be submitted.

If you have any questions regarding APD processing, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

Enclosures

cc: UDOGM

RECEIVED
FEB 25 2009
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0473			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME:			
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: FEDERAL 1022-27M			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0048 FSL 0337 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 27 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047500970000			
PHONE NUMBER: 720 929-6007 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
COUNTY: UTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/7/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____ </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.					
<div style="text-align: right;"> Approved by the Utah Division of Oil, Gas and Mining </div>		Date: September 03, 2009			
<div style="text-align: right;"> By: </div>					
NAME (PLEASE PRINT) Danielle Piernot		PHONE NUMBER 720 929-6156			
SIGNATURE N/A		TITLE Regulatory Analyst			
		DATE 9/3/2009			



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047500970000

API: 43047500970000

Well Name: FEDERAL 1022-27M

Location: 0048 FSL 0337 FWL QTR SWSE SEC 27 TWP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 9/15/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 9/3/2009

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P. **Date:** September 03, 2009

By: 

RECEIVED September 03, 2009

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0473
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: FEDERAL 1022-27M
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0048 FSL 0337 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 27 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047500970000
PHONE NUMBER: 720 929-6007 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UTAH		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/15/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: September 20, 2010

By: 

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 9/15/2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047500970000

API: 43047500970000

Well Name: FEDERAL 1022-27M

Location: 0048 FSL 0337 FWL QTR SWSE SEC 27 TWNP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 9/15/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 9/15/2010

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: September 20, 2010

By: 

RECEIVED September 15, 2010

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0473
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: FEDERAL 1022-27M
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0048 FSL 0337 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 27 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047500970000
PHONE NUMBER: 720 929-6515 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/19/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.		
Approved by the Utah Division of Oil, Gas and Mining Date: 08/22/2011 By:		
NAME (PLEASE PRINT) Gina Becker		PHONE NUMBER 720 929-6086
SIGNATURE N/A		TITLE Regulatory Analyst II
DATE 8/19/2011		



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047500970000

API: 43047500970000

Well Name: FEDERAL 1022-27M

Location: 0048 FSL 0337 FWL QTR SWSE SEC 27 TWNP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 9/15/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Gina Becker

Date: 8/19/2011

Title: Regulatory Analyst II **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

RECEIVED Aug. 19, 2011



GARY R. HERBERT
Governor

GREG BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

March 13, 2012

Jenn Hawkins
Kerr McGee Oil & Gas Onshore, L.P.
1099 18th Street, Suite 1800
Denver, CO 80202

Re: APDs Rescinded for Kerr McGee Oil & Gas Onshore, L.P.
Uintah County

Dear Ms. Hawkins:

Enclosed find the list of APDs that you requested to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective March 7, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal
SITLA, Ed Bonner



API Number	Well Name
4304750274	NBU 727-35E
4304737762	FEDERAL 920-24G
4304750439	FEDERAL 1022-15L
4304750440	FEDERAL 1022-15K
4304750441	FEDERAL 1021-25I
4304750442	FEDERAL 1021-25M
4304750443	FEDERAL 1021-25N
4304738796	FEDERAL 1022-27K
4304738980	BITTER CREEK 1122-3N
4304737763	FEDERAL 920-24H
4304739156	NBU 1022-24O
4304736573	NBU 1022-23C
4304751040	NBU 920-22L4CS
4304751041	NBU 920-22M1BS
4304751042	NBU 920-22M4BS
4304751051	NBU 920-23L2DS
4304751052	NBU 920-23L4BS
4304738921	NBU 1022-8B-4T
4304739253	NBU 921-15L
4304738159	NBU 1022-20B
4304738169	NBU 1022-28I
4304750464	NBU 922-33N4S
4304750465	NBU 922-33O4S
4304750466	NBU 922-33P2S
4304750467	NBU 922-33P3S
4304738820	LOVE 1121-18B
4304740189	NBU 922-35IT
4304738491	NBU 1022-5H-4
4304750093	NBU 1022-34F
4304750094	NBU 1022-35M
4304750095	NBU 1022-34E
4304750097	FEDERAL 1022-27M
4304750067	NBU 921-16F3S
4304750068	NBU 921-16E4S
4304737103	FEDERAL 1022-29C
4304750127	NBU 420-29E
4304739527	NBU 1021-20F
4304739528	NBU 1021-20E
4304739530	NBU 1021-20B
4304738741	LOVE 1121-7P
4304738742	LOVE 1121-7L
4304738744	LOVE 1121-7F
4304738745	LOVE 1121-7D
4304738747	LOVE 1121-8P
4304738750	LOVE 1121-8F
4304738754	LOVE 1121-15L
4304738755	LOVE 1121-15N
4304739525	NBU 1021-20H
4304738795	NBU 1022-27O
4304738807	NBU 1022-34D
4304738920	NBU 1022-4E-3
4304737547	NBU 1022-17P
4304751050	NBU 920-23L1BS
4304737907	NBU 1021-3L
4304737908	NBU 1021-3D

4304737909	NBU 1021-3H
4304737917	NBU 1021-25E
4304737911	NBU 1021-24C
4304750029	NBU 375-13E
4304750033	NBU 515-25E
4304750034	NBU 673-25E
4304750035	NBU 674-25E
4304737963	NBU 1021-3G
4304737965	NBU 1021-5D
4304737684	NBU 498-13E